


Supplemental Assembly Instructions - 01/01/2010

- Remove shipping throttle stop from carburetor (steps 1-3).


Throttle stop located on top of carburetor.

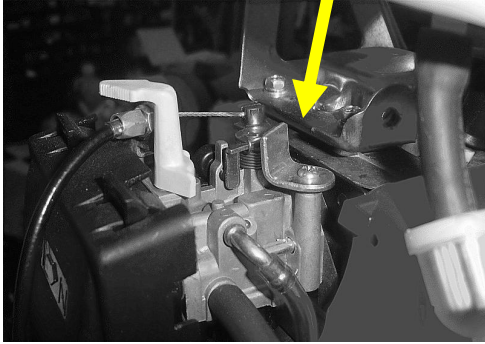


1. Remove gas tank from engine by removing (2) tank mounting bolts. (use a 10mm socket).



2. Pull gas hose off carburetor and set tank and hose aside.

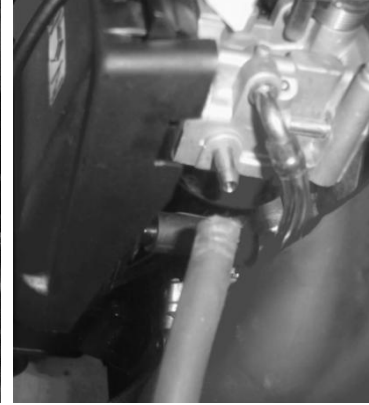

3. Remove throttle stop using a Phillips screwdriver. Discard angle stop and reinstall screw.

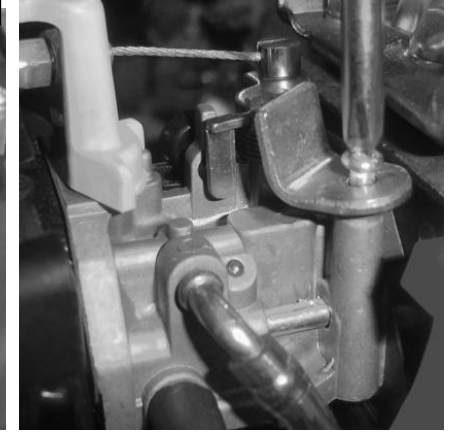

- Install gas line hose clamp to secure hose to carburetor fitting (steps 4-6).

4. Use pliers to squeeze the 3/8" hose clamp then slide the clamp onto the gas line. Slide clamp onto hose about 1/8" as shown.



5. Push hose with clamp onto carburetor fitting. Ensure clamp is pushed past bubbled end of fitting.



6. Reinstall gas tank and mounting screws.

